

10/13/00  
JC945 U.S. PTO

10-16-00

A  
JC929 U.S. PTO  
09/687518  
10/13/00

Attorney Docket No.: PALM-3513.US.P

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**  
**Patent Application**

I hereby certify that this transmittal of the below described documents is being deposited with the United States Postal Service in an envelope bearing Express Mail Postage and an Express Mail label, with the below serial number, addressed to the Commissioner of Patents and Trademarks, Washington, D.C., 20231, on the below date of deposit.			
Express Mail Label No.:	EL676375027US	Name of Person Making the Deposit:	ANTHONY CHOU
Date of Deposit:	10/13/00	Signature of the Person Making the Deposit:	<i>Anthony Chou</i>

Inventor(s): Rich Karstens and Ryan Robertson

Title: METHOD AND SYSTEM FOR SINGLE-STEP ENABLEMENT OF TELEPHONY  
FUNCTIONALITY FOR A PORTABLE COMPUTER SYSTEM

The Commissioner of Patents and Trademarks  
Washington, D.C. 20231  
Sir:

Transmittal of a Patent Application  
(Under 37 CFR §1.53)

Transmitted herewith is the above identified patent application, including:

- ☒ Specification, claims and abstract, totaling 27 pages.
- ☐ Formal drawings, totaling pages.
- ☒ Informal drawings, totaling 8 pages.
- ☒ Declaration and Power of Attorney.
- ☐ Information Disclosure statement.
- ☐ Form 1449
- ☐ Assignment(s)
- ☐ Assignment Recordation Form (duplicate)
- ☐ Preliminary Amendment

**FEES DUE**

The fees due for filing the specification pursuant to 37 C.F.R. § 1.16 and for recording of the Assignment, if any, are determined as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEES
Basic Application Fee					\$710.00
Total Claims	31	Minus 20=	11	X \$18 =	\$198.00
Independent Claims	3	Minus 3=	0	X \$80=	\$0.00
If multiple dependent claims are presented, add \$260.00					\$0.00
Add Assignment Recording Fee of \$40.00 If Assignment document is enclosed					\$0.00
<b>TOTAL APPLICATION FEE DUE</b>					<b>\$908.00</b>

**PAYMENT OF FEES**

The full fee due in connection with this communication is provided as follows:

1. Not enclosed
  - ☐ No filing fee is to be paid at this time.
2. Enclosed
  - ☒ Filing fee
  - ☐ Recording assignment
  - ☐ Petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or cannot be reached
  - ☐ For processing an application with specification in a non-English language
  - ☐ Processing and retention fee
  - ☐ Fee for international-type search report
  - ☒ The Commissioner is hereby authorized to charge any additional fees associated with this communication or credit any overpayment to Deposit Account No.: 23-0085. A duplicate copy of this authorization is enclosed.
  - ☒ A check in the amount of \$908.00
  - ☐ Charge any fees required or credit any overpayments associated with this filing to Deposit Account No.: 23-0085.

This application is filed pursuant to 37 C.F.R. § 1.53 in the name of the above-identified Inventor(s).

Please direct all correspondence concerning the above-identified application to the following address:

**WAGNER, MURABITO & HAO LLP**  
Two North Market Street, Third Floor  
San Jose, California 95113  
(408) 938-9060

- ☒ This transmittal ends with this page.

Respectfully submitted,

Date: 10/13/00

By: Matthew J. Blecher

Matthew J. Blecher  
Reg. No. 46,558

## UNITED STATES PATENT APPLICATION

for

# METHOD AND SYSTEM FOR SINGLE-STEP ENABLEMENT OF TELEPHONY FUNCTIONALITY FOR A PORTABLE COMPUTER SYSTEM

**Inventor:**

## Rich Karstens

**Ryan Robertson**

prepared by:

WAGNER, MURABITO &amp; HAO

Two North Market Street

### Third Floor

San Jose, CA 95113

(408) 938-9060

**METHOD AND SYSTEM FOR SINGLE-STEP ENABLEMENT  
OF TELEPHONY FUNCTIONALITY FOR A PORTABLE COMPUTER SYSTEM**

**BACKGROUND OF THE INVENTION**

5

**FIELD OF THE INVENTION**

The present invention relates to the field of portable electronic devices such as personal digital assistants or palmtop computer systems.

Specifically, the present invention relates to a method and system for allowing  
10 a background task to run on a portable electronic device facilitating telephony functionality on the portable electronic device.

**RELATED ART**

As the components required to build a computer system have reduced in  
15 size, new categories of computer systems have emerged. One of the more recent categories of computer systems is the portable or "palmtop" computer system, or personal digital assistant (PDA). A palmtop computer system is a computer that is small enough to be held in the hand of a user and is thus "palm-sized." As a result, palmtops are readily carried about in a briefcase or  
20 purse, and some palmtops are compact enough to fit into a person's pocket. By virtue of their size, palmtop computer systems are also lightweight and so are exceptionally portable and convenient.

The emergence of the cellular phone technology in the last few years has revolutionized the telecommunications industry. Where in the past telephones were largely confined to homes, offices, and other stationary structures, cellular phone technology has made it possible for phones to be truly portable and exist nearly anywhere there are people.

Recently, the technology behind both palmtop computer systems and cellular phones has advanced to the point where it is proposed to integrate cellular phone capabilities into a palmtop computer system, while not increasing the size of the palmtop device. However, the operating systems that control some palmtop computer systems (for example, Palm computer systems) have not been designed especially with cellular phone technology in mind. As a result, difficulty arises for answering incoming calls when palmtop devices are in certain modes.

Referring to Figure 1, one prior art process 100 for answering an incoming phone call on a telephony enabled palmtop computer system is shown. In step 105, an incoming phone call is received by the operating system. The operating system then determines in step 110 whether or not the graphical user interface is busy, e.g. waiting for information from a user. In the event that the graphical user interface is not busy, the incoming phone call interrupt activates causing the device to ring (step 115) and the user may answer the phone call (step 120). However, when the graphical user interface

is busy, the incoming call may become ignored thereby preventing the phone call from being answered (step 125).

5 The graphical user interface of a palmtop computer systems is partially controlled by the operating system. While the operating system is classified as multitasking, all user interfacing is done under one "thread." As a result, on some occasions, an application may block the operating system from running any other applications. This occurs when the application at use requires a user input through a graphical user interface. In this case, the operating  
10 system will not run any other applications until the user has entered an input. The application at use may also block the operating system from running other applications if the application is not processing system events in a timely manner. It would be advantageous to provide an electronic device that is portable and integrates cellular phone technology with portable computer  
15 system technology and that facilitates telephony functions regardless of the software state of the portable computer system.

## SUMMARY OF THE INVENTION

Accordingly, what is needed is a method and/or system that enables the user of a device, such as a palmtop computer system or a PDA, to answer  
5 incoming phone calls using the device even when a graphical user interface of the device is awaiting a user input, and is therefore blocked. What is also needed is a method and/or system for notifying the user of an incoming call when the graphical user interface is blocked. In addition, what is needed is a method and/or system that can satisfy the above needs and that is user-friendly  
10 and convenient. The present invention provides these advantages and others not specifically mentioned above but described in the sections to follow.

A method and system are described for automatic delivery of a phone call on a palmtop device (e.g. a palmtop computer system or a PDA)  
15 regardless of whether other tasks are running on the operating system. Embodiments include a separate background task ("thread") interfacing directly with the telephony functionality of the palmtop device to enable telephony functionality regardless of the state of the graphical user interface. In one embodiment, the background task, which runs under the operating system, is  
20 always active and functions to monitor an interrupt line and controls the serial port connected to a phone chipset/module. The background task responds to an incoming call even if the user is in a graphical user interface window that requires some input from the user (e.g. the user interface is blocked), and the

task alerts the user of the incoming phone call. Therefore, calls can be answered using the device regardless of the state of the graphical user interface. The background task also senses any of the palmtop device's telephony buttons and controls any ringer, vibrator or LEDs of the device's hardware, as well as any buttons located on a headset or earpiece connected to the device.

One embodiment is relevant when the graphical user interface is not blocked and one or more phone related displays can automatically be displayed on the device's screen. The phone related displays are similar to those displayed on cellular phones. The background task monitors for and receives incoming phone calls, interfaces with the graphical user interface to display any call information on the device's screen, alerts the user as to the incoming call (via any ringer, vibrator and/or LEDs), and permits the user to answer the phone via a button on the palmtop device itself or a button on any earpiece or headset the user is operating.

Another embodiment is relevant when the graphical user interface is blocked but the user can still answer the phone despite no phone related displays appearing on the device's screen. This allows a user to be alerted to an incoming phone call (via any ringer, vibrator and/or LEDs) and to answer the phone via a button on the device itself or a button on any earpiece or headset



the user is operating, without requiring the use of the device's LCD screen or the screen digitizer.

In accordance with the present embodiment of the present invention, the  
5 telephony functionality is automatically implemented in the background  
transparent to the user, and thus is convenient and user-friendly. In addition,  
the user is notified of an incoming phone call even when the graphical user  
interface is blocked, therefore greatly enhancing the usefulness and  
commercial practicability of palmtop computer system with telephony  
10 functionality.

## BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a flowchart showing the steps of a process for answering an incoming call on a telephony enabled palmtop computer system in accordance  
5 with the prior art.

Figure 2 is a top side perspective view of a portable computer system and an earbud piece in accordance with one embodiment of the present  
10 invention.

Figure 3 is a block diagram of one embodiment of a portable computer system in accordance with the present invention.

Figure 4a is a software block diagram showing a device with a separate  
15 task to handle telephony functions.

Figure 4b is a software block diagram showing a device with a separate task to handle telephony functions in accordance with one embodiment of the present invention.  
20

Figure 5 is a flowchart showing steps of a process for answering an incoming call on a portable computer system running a background task in accordance with an embodiment of the present invention.

Figure 6 illustrates an exemplary display of the caller information during an incoming telephone call in a portable computer system in accordance with one embodiment of the present invention.

5

Figure 7 illustrates an exemplary display of the phone dialer for the telephony functionality application in a portable computer system in accordance with one embodiment of the present invention.

CONFIDENTIAL

## DETAILED DESCRIPTION

In the following detailed description of the present invention, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be recognized by one skilled in the art that the present invention may be practiced without these specific details or with equivalents thereof. In other instances, well known methods, procedures, components, and circuits have not been described in detail as not to unnecessarily obscure aspects of the present invention.

### NOTATION AND NOMENCLATURE

Some portions of the detailed descriptions, which follow, are presented in terms of procedures, steps, logic blocks, processing, and other symbolic representations of operations on data bits that can be performed on computer memory. These descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. A procedure, computer executed step, logic block, process, etc., is here, and generally, conceived to be a self-consistent sequence of steps or instructions leading to a desired result.

The steps are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated in a computer system. It has proven convenient at

times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

It should be borne in mind, however, that all of these and similar terms  
5 are to be associated with the appropriate physical quantities and are merely  
convenient labels applied to these quantities. Unless specifically stated  
otherwise as apparent from the following discussions, it is appreciated that  
throughout the present invention, discussions utilizing terms such as  
"monitoring" or "notifying" or "interfacing" or "receiving" or "answering" or "the  
10 like, refer to the action and processes of a computer system (e.g., process 500  
of Figure 5), or similar electronic computing device, that manipulates and  
transforms data represented as physical (electronic) quantities within the  
computer system's registers and memories into other data similarly  
represented as physical quantities within the computer system memories or  
15 registers or other such information storage, transmission or display devices.

The present invention is discussed primarily in the context of a portable  
computer system, such as a palmtop or personal digital assistant, with  
telephony functionality, allowing the portable computer system to act as a  
20 cellular phone. However, it is appreciated that the present invention can be  
used with other types of devices that have the capability to access some type of  
central device or central site, including but not limited to laptop computer  
systems.

EXEMPLARY PORTABLE COMPUTER SYSTEM PLATFORM

Figure 2 is a perspective illustration of a portable computer system 200 and an earbud piece 230 in accordance with one embodiment of the present invention. The portable computer system 200 is implemented with telephony functionality and also contains a display screen 205. A stylus 220 is also shown. The stylus 220 can be stored in a slot located in portable computer system 200. The display screen 205 contains digitized regions 208 and is a touch screen able to register contact between the screen 205 and the tip of the stylus 220. The stylus 220 can be made of any material to make contact with the screen 205. The portable computer system 200 also contains one or more dedicated and/or programmable buttons 210 for selecting information and causing the computer system to implement functions. The portable computer system 200 also may contain at least one earbud/headset jack 215 for connecting a listening/answering device to the portable computer system 200. The on/off button 225 is also shown.

Figure 2 also illustrates an exemplary earbud 230 in accordance with one embodiment of the present invention. The earbud 230 is able to connect with the portable computer system 200 by inserting the plug 245 into the earbud/headset jack 215. The earbud 230 also comprises one or more programmable buttons 235. In one embodiment, programmable button 235 is

used to answer or disconnect a phone call. The earbud 230 also comprises a microphone 240 and an earpiece 250.

In one embodiment of the present invention, the earbud 230 and/or the microphone 240 may be replaced with a headset. In another embodiment of the present invention, the earbud 230 may be replaced with a wireless earbud or headset.

Figure 3 illustrates circuitry of exemplary computer system 300, some of which can be implemented on a PC board located inside the portable computer system 200. Computer system 300 includes an address/data bus 315 for communicating information, a central processor 301 coupled with the bus for processing information and instructions, a volatile memory 302 (e.g., random access memory, RAM) coupled with the bus 315 for storing information and instructions for the central processor 301 and a non-volatile memory 303 (e.g., read only memory, ROM) coupled with the bus 315 for storing static information and instructions for the processor 301.

Computer system 300 also includes an optional data storage device 304 (e.g., memory stick) coupled with the bus 315 for storing information and instructions. Device 304 can be removable. As described above, computer system 300 also contains a display device 305 coupled to the bus 315 for displaying information to the computer user. The PC board can contain the

processor 301, the bus 315, the ROM 303 and the RAM 302. Computer system 300 also includes a signal transmitter/receiver device 308, which is coupled to bus 315 for providing a physical communication link between computer system 300, and a network environment.

5

In one embodiment, computer system 300 includes a communication circuit 309 coupled to bus 315. Communication circuit 309 includes an optional digital signal processor (DSP) 320 for processing data to be transmitted or data that are received via signal transmitter/receiver device 308.

10 Alternatively, processor 301 can perform some or all of the functions performed by DSP 320.

Also included in computer system 300 of Figure 3 is an optional alphanumeric input device 306 that in one implementation is a handwriting  
15 recognition pad ("digitizer"). Alphanumeric input device 306 is a user interface device and can communicate information and command selections to processor 301. Computer system 300 also includes an optional cursor control or directing device (on-screen cursor control 307) coupled to bus 315 for communicating user input information and command selections to processor  
20 301. In one implementation, on-screen cursor control device 307 is a user interface device and is a touch screen device incorporated with display device 305. On-screen cursor control device 307 is capable of registering a position on display device 305 where the stylus makes contact. The display device 305



utilized with computer system 300 may be a liquid crystal display device, a cathode ray tube (CRT), a field emission display device (also called a flat panel CRT) or other display device suitable for generating graphic images and alphanumeric characters recognizable to the user. In the preferred  
5 embodiment, display device 305 is a flat panel display, display screen 205 (Figure 2).

With reference still to Figure 3, computer system 300 also includes a serial port 310, which is coupled between bus 315 and GSM/GPRS telephony  
10 chipset 311, serving as an exemplary interface between the central processor 301 and the GSM/GPRS telephony chipset 311. Global System for Mobile Communications (GSM) and General Packet Radio Service (GPRS) are standards for wireless communications, and are common to the area of cellular communications. The GSM/GPRS telephony chipset 311 enables the  
15 computer system 300 to provide the functionality of a cellular phone. It should be appreciated that within the present embodiment, GSM/GPRS telephony chipset 311 provides the telephony functionality to transmit and receive cellular communications. It should be further appreciated that the present embodiment of GSM/GPRS telephony chipset 311 is well suited to be implemented in a wide  
20 variety of ways. For example, GSM/GPRS telephony chipset 311 could be implemented as a modem.

SINGLE-STEP ENABLEMENT OF TELEPHONY FUNCTIONALITY FOR A PORTABLE  
COMPUTER SYSTEM IN ACCORDANCE WITH THE PRESENT INVENTION

Figure 4a is a block diagram 400, in accordance with one embodiment of the present invention, illustrating a device (e.g. a palmtop or portable computer system) having a separate background task that interfaces directly with the telephony functionality (e.g. a cellular phone) of the device. In one embodiment of the present invention, the device 405 contains at least two chipsets, an operating system chipset 410 and a phone chipset 425. Operating system chipset 410 operates to control a wide variety of applications of the device including the graphical user interface 415 and the telephony task 420.

In one embodiment of the present invention, phone chipset 425 receives incoming phone calls. The telephony task 420 monitors the phone chipset 425 for incoming calls. The telephony task 420 also controls any ringers, vibrators or LEDs functioning for notifying a user of an incoming phone call.

Upon receiving notice of an incoming phone call, in one embodiment of the present invention, the telephony task 420 will attempt to notify the operating system 410 of the incoming phone call, irrespective of whether the user interface is active (e.g. a user is using the device). At the time of the incoming phone call, the graphical user interface 415 may be busy (i.e. waiting for information from the user). If the graphical user interface 415 is busy, it may block any access by the telephony task 420 depending on how the modes are set that control this functionality.

Figure 4b is a software block diagram 450 showing a portable computer system with a separate task to handle telephony functions in accordance with one embodiment of the present invention. The background task 455 responds to the interrupt line 460, wherein the interrupt line 460 monitors for incoming phone calls. The background task 455 is also connected to the telephony chipset 465 through serial port 470. The background task 455 senses the system buttons and the graphical user interface of the portable computer system, and controls any LED, ringer or vibrator 480.

10

Figure 5 is a flowchart showing the steps in a process 500 for notifying a device (e.g. a portable or palmtop computer system) with telephony functionality of an incoming phone call and for notifying and updating the device's graphical user interface in accordance with one embodiment of the present invention.

15 Process 500 is an implementation of the present invention.

In Step 505 of process 500 an incoming call is received by the telephony task which then notifies the user of the incoming call irrespective of the user's activity on the device. The notification may be in the form of activating any ringer, vibrator, or LED hardware or software located within the device.

20

In step 510 of process 500 the telephony task attempts to notify and update the graphical user interface. As stated above, the graphical user

interface may be busy, as it is waiting for user input. In the event that the graphical user interface is busy, as shown in step 530 of process 500, the graphical user interface still may not be blocked, depending on the application using the graphical user interface. If the graphical user interface is not blocked, then the application using the graphical user interface may receive notification of the incoming phone call.

In step 515 of process 500 the graphical user interface is either not busy or busy but not blocked. In this event, the graphical user interface is notified and updated. For example, an incoming call form containing information that an incoming call has been received is displayed on the device's screen. The form may contain a wide variety of information including caller identification and various answering options.

Figure 6 is an exemplary display 600 of the caller identification during an incoming call in accordance with one embodiment of the present invention. Screen 605 includes a title bar 610 that includes information about the application using the graphical user interface. In one embodiment of the present invention, caller identification information 615 is displayed on screen 605. Digitized buttons 620 allow for the user, with use of a stylus, to provide the operating system with the requested user inputs.

For further exemplary purposes, Figure 7 is an exemplary display 700 of the phone dialer for the telephony functionality application in a portable computer system. Screen 705 includes a title bar 710 that contains information about the application using the graphical user interface. Digitized telephone buttons 715 allow for the user, with use of a stylus, to enter in the phone number the user wishes to dial. Digitized buttons 720 are programmable to perform further telephony functions.

Returning to Figure 5, in step 520 of process 500, the user answers the phone call. The device may offer users several different answering options, including an answering option on the graphical user interface, a button on the device itself, or a button on any headset or earbud coupled to the device. Once the phone call is connected, in step 525 of process 500, the graphical user interface is again notified and updated. In one embodiment the display may contain a message that the call has been answered. The display may also contain information such as the length of the call.

In the event that the graphical user interface is busy, as shown in step 530 of process 500, the graphical user interface may be also blocked, prohibiting the graphical user interface from receiving notification of the incoming phone call. In step 535 of process 500 the telephony task attempts to notify and update the graphical user interface, but is unable to as the graphical user interface is blocked. In this situation, the program currently occupying the

graphical user interface is not affected, and the telephony task is blocked from access.

5 In step 540 of process 500, the user answers the phone call. The device may offer users several different answering options, including a button on the device itself or a button on any headset or earbud coupled to the device. It should be understood that even though the graphical user interface is blocked, the phone may still be answered.

10 In step 545 of process 500, the graphical user interface is again notified. However, as the graphical user interface is still blocked, the display is not updated.

15 In summary, in accordance with the present invention, when a device (e.g., a portable device such as portable computer system 100) with telephony functionality receives a phone call, the call can be answered by the user, regardless of whether other tasks are running on the operating system. A separate background task, independent of the user interface task, enables telephony functionality without requiring use of the graphical user interface.

20 The background task monitors an interrupt line and controls the serial port connected to the phone chipset.

In accordance with the present embodiment of the present invention, telephony functionality is enabled in all situations, even where the graphical user interface is blocked. In addition, telephony functionality can be automatically implemented in the background without a user knowing it is occurring, and thus is convenient and user-friendly.

Thus, the present invention enables telephony functionality in a device such as a portable (palmtop) computer system, PDA, laptop or other types of device, even when the graphical user interface is blocked. In addition, the present invention provides a system and method that is user-friendly and convenient.

The preferred embodiment of the present invention, a method and system for automatic delivery of a phone call on a portable electronic device, is thus described. While the present invention has been described in particular embodiments, it should be appreciated that the present invention should not be construed as limited by such embodiments, but rather construed according to the below claims.

CLAIMS

What is claimed is:

- 5           1. In a portable electronic device, a method for automatically delivering a phone call, said method comprising the steps of:
- a) monitoring for incoming phone calls by a background task interfacing directly with the telephony functionality of said device, said background task always active, said device's operating system including at least one graphical
- 10   user interface;
- b) detecting said incoming phone call by said background task;
- c) notifying said operating system of said incoming phone call by said background task; and
- d) said background task notifying the user of said device of said
- 15   incoming phone call irrespective of the user's activity on said device.
2. The method as recited in Claim 1 wherein said portable electronic device is a palmtop computer system.
- 20           3. The method as recited in Claim 1 further comprising the step of e) answering said incoming phone call by the user.



4. The method as recited in Claim 1 wherein said step c) comprises the step of said background task operating to notify the user of said device of said incoming phone call irrespective of the user's activity on said device, provided said graphical user interface is blocked.

5

5. The method as recited in Claim 1 wherein said step c) comprises the step of said graphical user interface being updated and including an image of a cellular phone keypad and digitry, provided said graphical interface is not blocked.

10

6. The method as recited in Claim 5, wherein said background task operates to notify the user of said device of said incoming phone call irrespective of the user's activity on said device.

15

7. The method as recited in Claim 1 wherein step d) is performed by activating a ringer on said device.

8. The method as recited in Claim 1 wherein step d) is performed by activating a vibrator on said device.

20

9. The method as recited in Claim 1 wherein step d) is performed by activating LEDs on said device.

10 The method as recited in Claim 3 wherein step e) is performed by  
pressing a button on said device.

11. The method as recited in Claim 3 wherein step e) is performed by  
5 pressing a button on an earbud coupled to said device.

12. The method as recited in Claim 3 wherein step e) is performed by  
pressing a button on a headset coupled to said device.

10 13. The method as recited in Claim 3 wherein step e) is performed by  
acknowledging an incoming call display on said graphical user interface.

14. A method for automatically delivering a phone call to a device, said  
method comprising the steps of:

- 15 a) monitoring for incoming phone calls by a task interfacing directly with  
the telephony functionality of said device, said task always remaining active  
irrespective of the activities of an operating system of said device;
- b) receiving said incoming phone call by said task; and
- c) said task notifying the user of said device of said incoming phone call  
20 irrespective of the user's activity on said device.

15. The method as recited in Claim 14 wherein said device is a palmtop  
computer system.

16. The method as recited in Claim 14 further comprising the step of d) answering said incoming call by the user.

5           17. The method as recited in Claim 14 wherein step c) is performed by activating a ringer on said device.

18. The method as recited in Claim 14 wherein step c) is performed by activating a vibrator on said device.

10           19. The method as recited in Claim 14 wherein step c) is performed by activating LEDs on said device.

20           20. The method as recited in Claim 16 wherein step d) is performed by pressing a button on said device.

21. The method as recited in Claim 16 wherein step d) is performed by pressing a button on an earbud coupled to said device.

20           22. The method as recited in Claim 16 wherein step d) is performed by pressing a button on a headset coupled to said device.

23. A system for automatically delivering a phone call to a device, said system comprising:

a processor coupled to a bus and a display screen coupled to said bus;

a cellular phone mechanism;

5 a memory unit coupled to said bus and having stored therein an operating system executed by said processor and a background task executed by said processor, said operating system including at least one graphical user interface; where said background task performs to the steps of

a) monitoring for incoming phone calls by a background task interfacing  
10 directly with the telephony functionality of said device, said background task always active, said device's operating system including at least one graphical user interface;

b) detecting said incoming phone call by said background task;

c) notifying said operating system of said incoming phone call by said  
15 background task; and

d) said background task notifying the user of said device of said incoming phone call irrespective of the user's activity on said device.

24. The system as recited in Claim 23 wherein said device is a palmtop  
20 computer system.

25. The system as recited in Claim 23 wherein said listening/speaking apparatus is an earbud.

26. The system as recited in Claim 23 wherein said listening/speaking apparatus is a headset.

5        27 The system as recited in Claim 23 wherein said background task monitors for said incoming phone calls.

10        28. The system as recited in Claim 27 wherein said background task receives said incoming phone calls.

15        29. The system as recited in Claim 28 wherein said background task notifies said graphical user interface of said incoming phone call.

20        30. The system as recited in Claim 29 wherein said graphical user interface is blocked, whereby said background operates to notify the user of said device of said incoming phone call irrespective of the user's activity on said device.

25        31. The system as recited in Claim 29 whereby said graphical user interface is updated, notifies the user of said device of said incoming phone call irrespective of the user's activity on said device, and includes an image of a cell phone keypad and digitry.

ABSTRACT OF THE DISCLOSURE

5 A method and apparatus for automatic delivery of a phone call on a device (e.g. a portable computer system) regardless of whether other tasks are running on the operating system. A separate background task ("thread"), independent of the operating system, enables telephony functionality without regard to the mode of a graphical user interface. The background task is always active and functions to respond to an incoming call even if the user is in a graphical user interface window that requires some input from the user (e.g. the graphical user interface is blocked). In one embodiment, the background task running under the operating system monitors an interrupt line and controls the serial port connected to a phone chipset/module. The background task also senses any of the device's buttons and controls any ringer, vibrator or LEDs of the device's hardware. In one embodiment, if the graphical user interface is not blocked then one or more phone related displays can automatically be displayed on the screen. The phone related displays are similar to those displayed on cellular phones. In another embodiment, if the graphical user interface is blocked, the user can still answer the phone with no phone related displays on screen. This allows a user to be alerted to an incoming phone call (via any ringer, vibrator and/or LEDs) and to answer the phone via a button on the device, without requiring the use of the device's LCD screen or the screen digitizer.

Figure 1


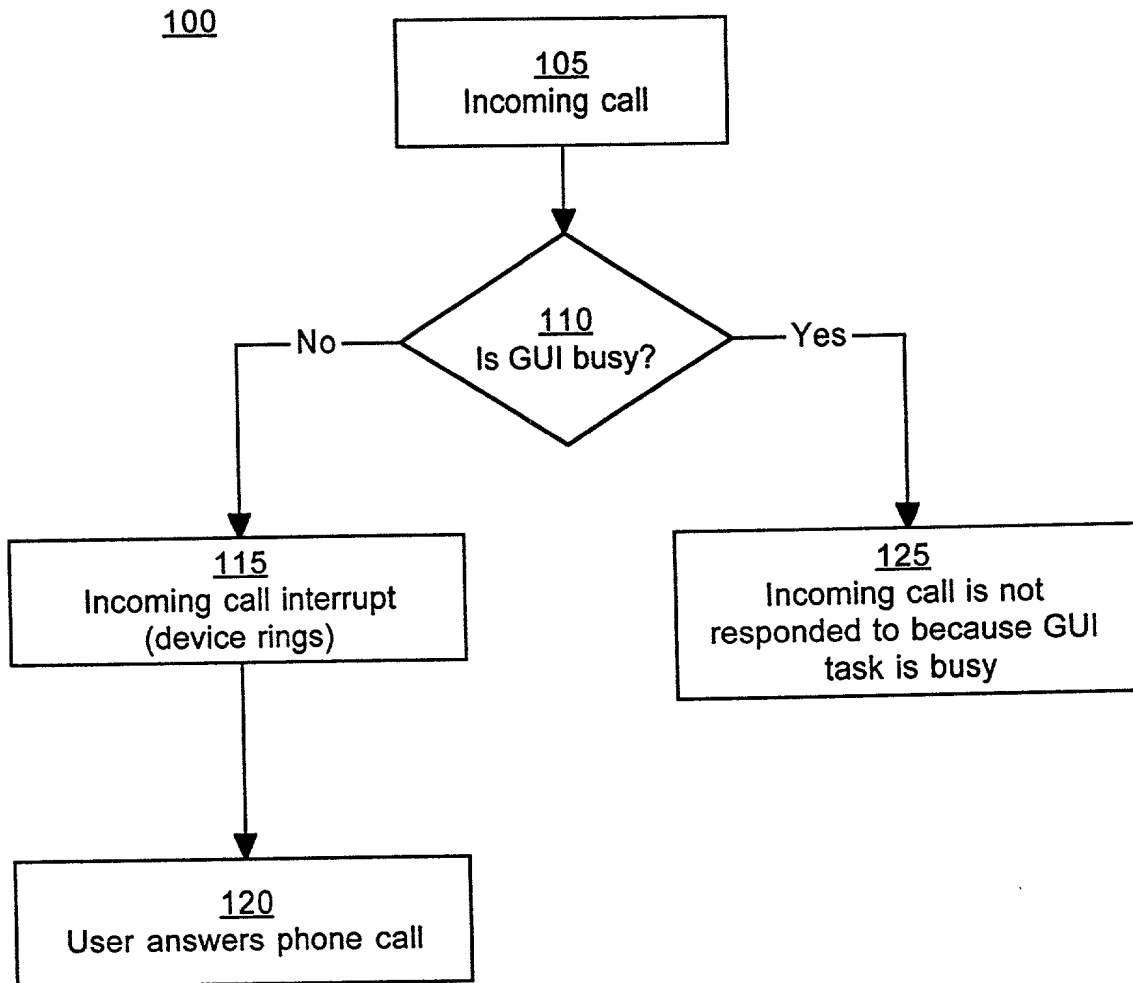



Figure 2



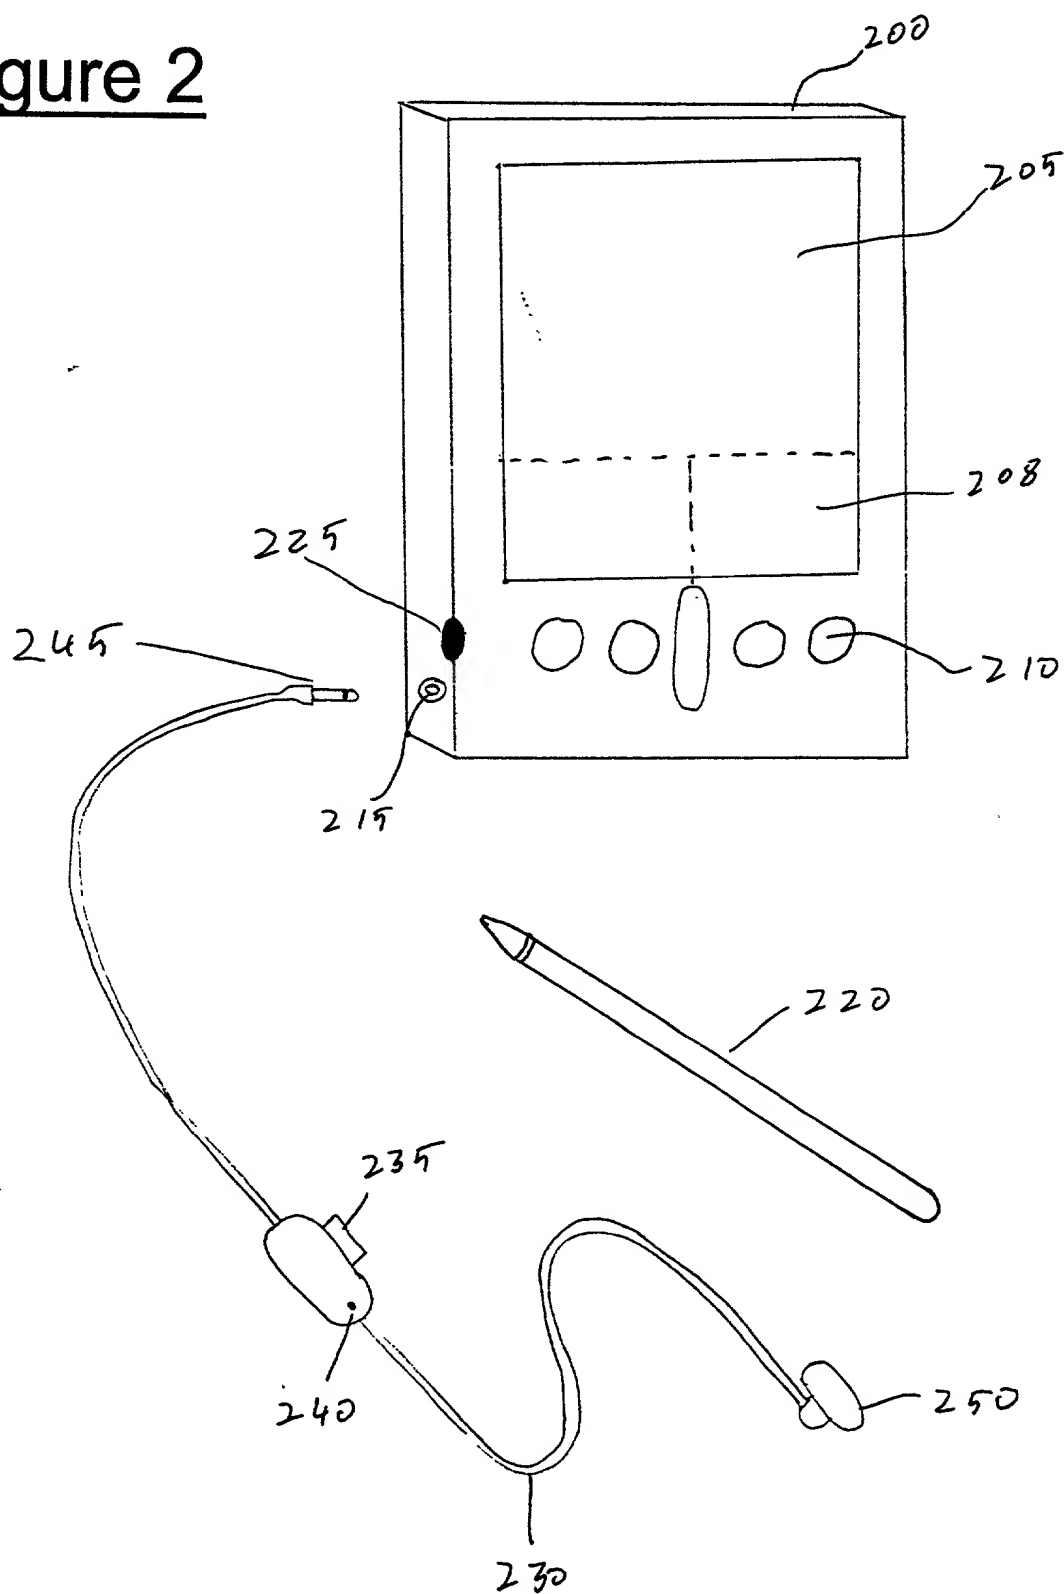


# Figure 3

300

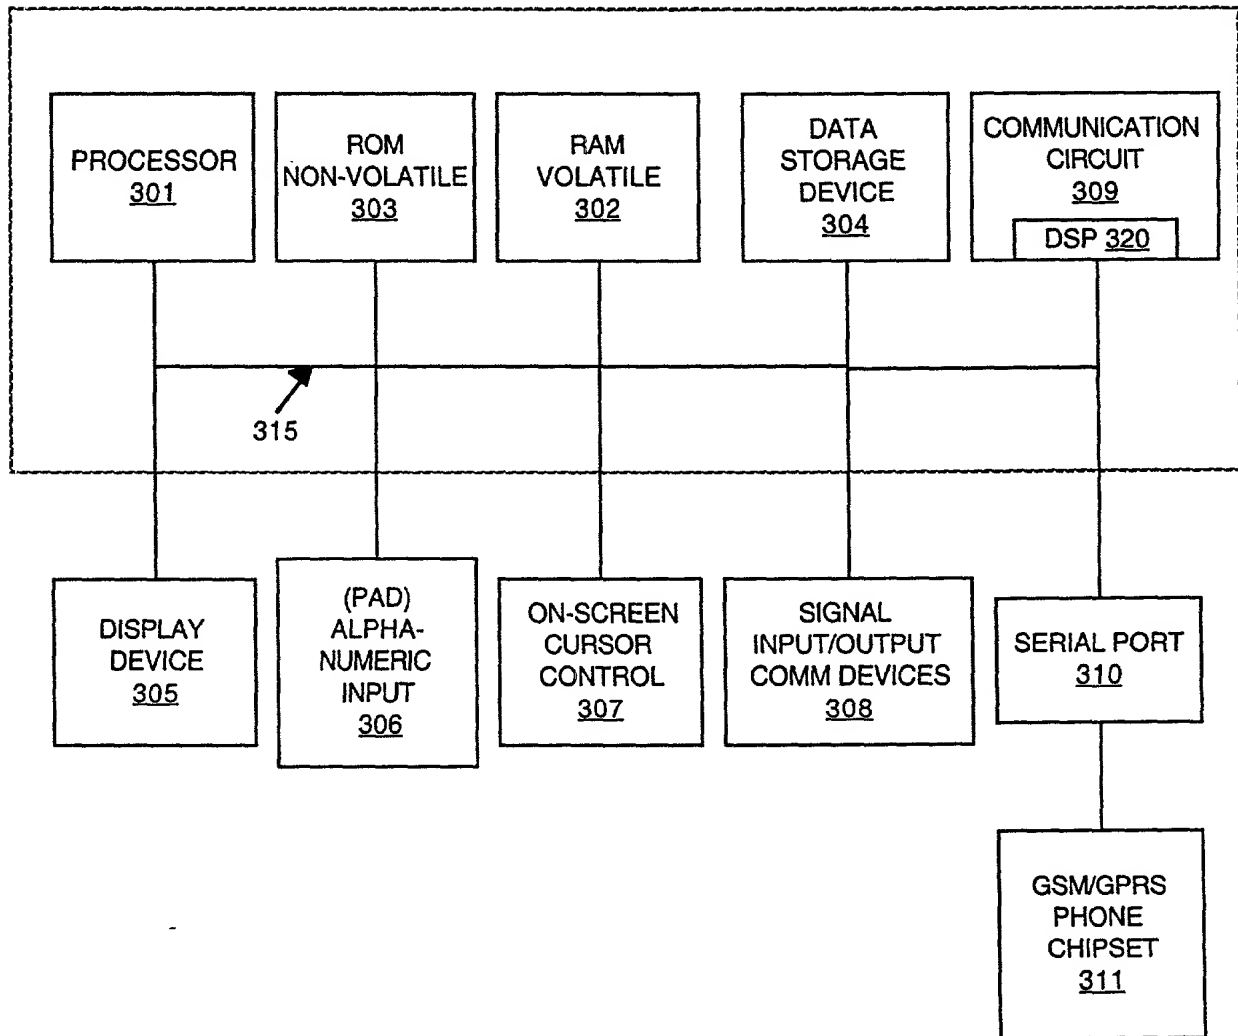


# Figure 4a

400  
Device with Separate Telephony Task

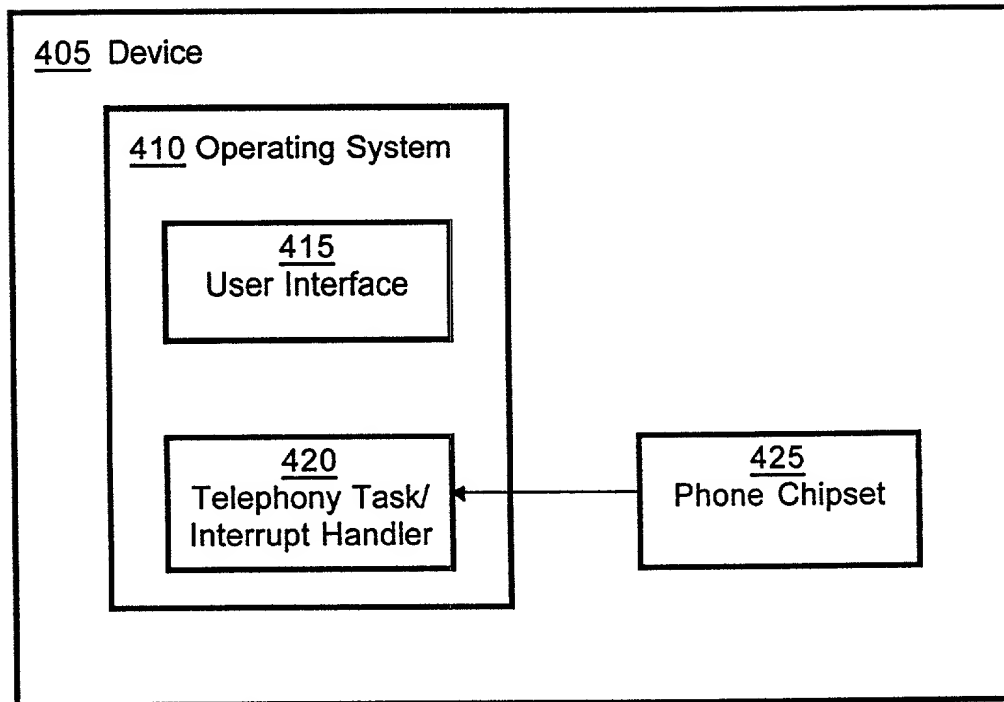


# Figure 4b

450

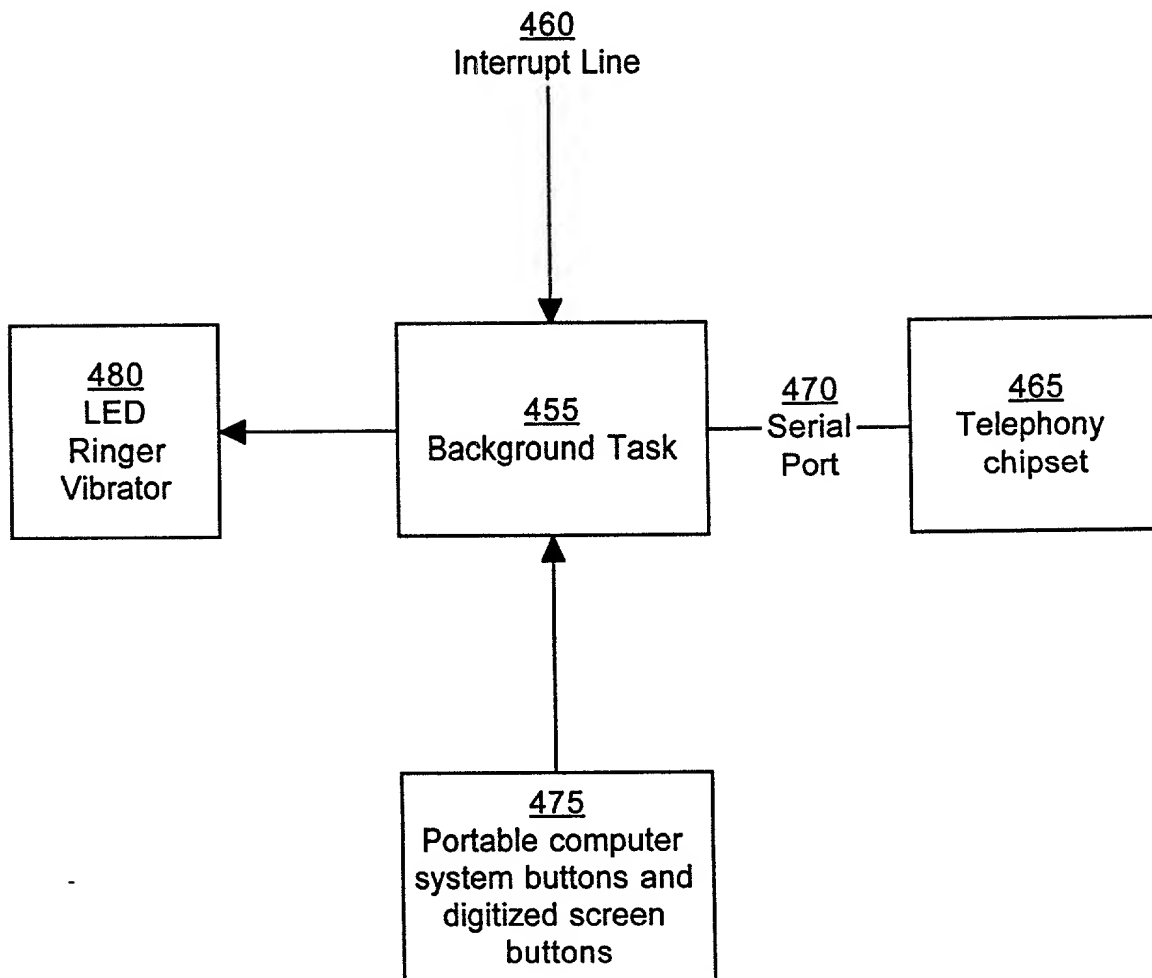


# Figure 5


500

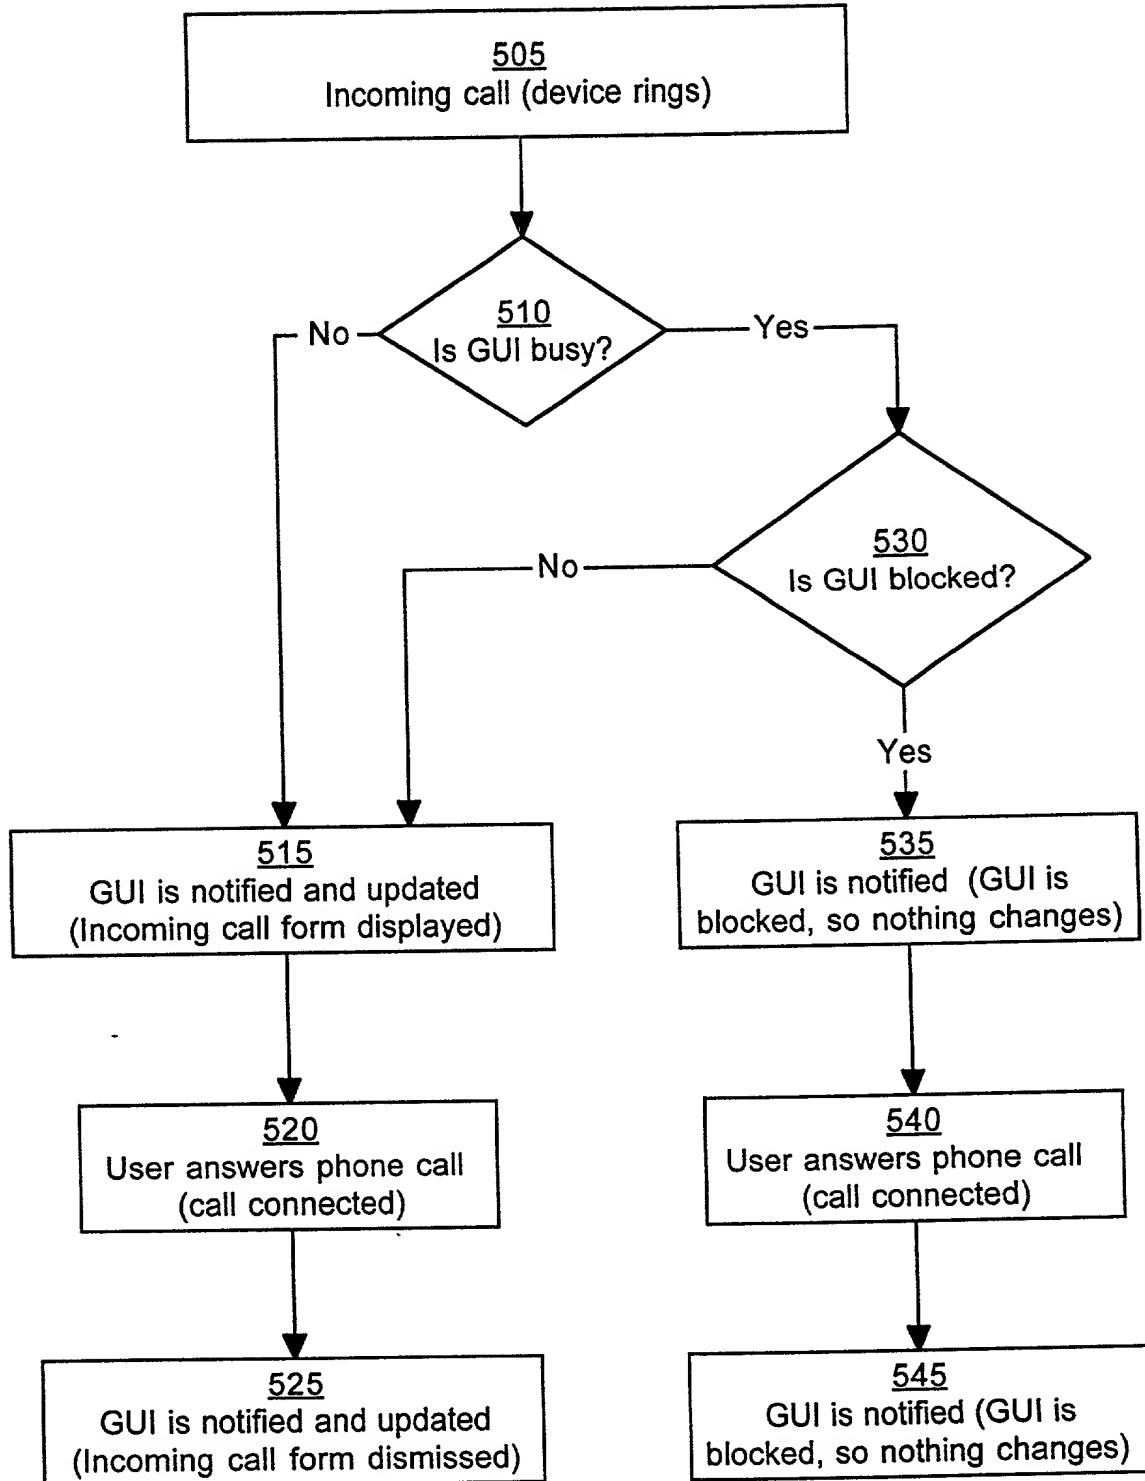

# Figure 6

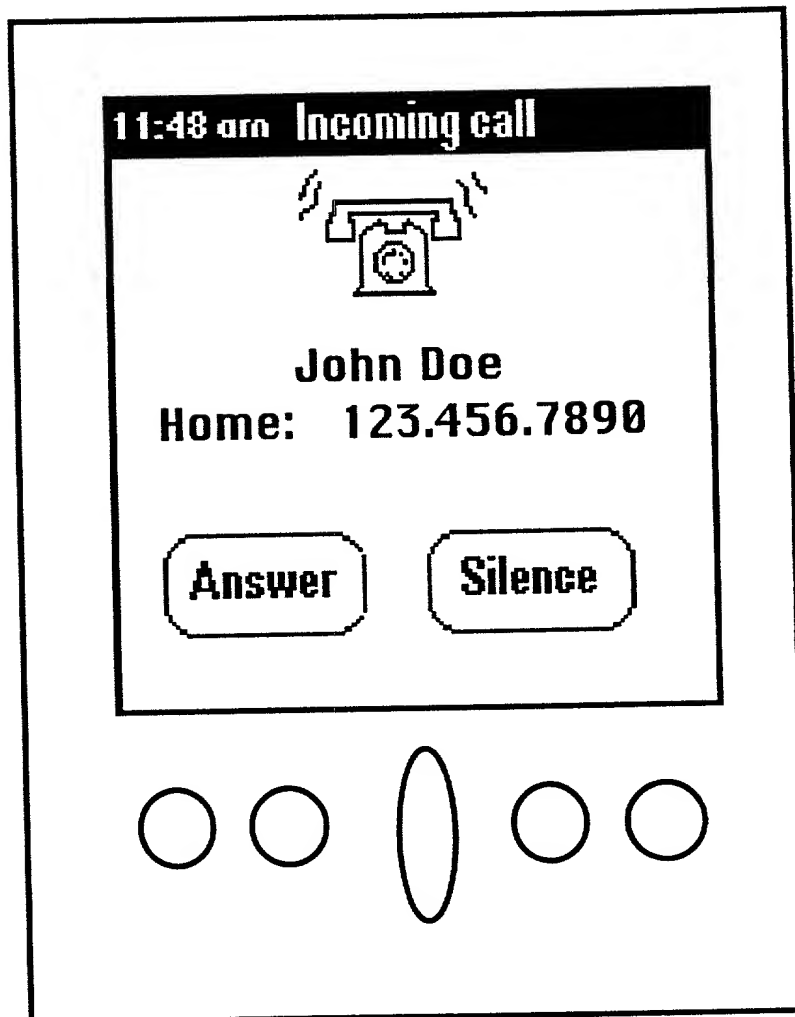

002707" 8T3/28960

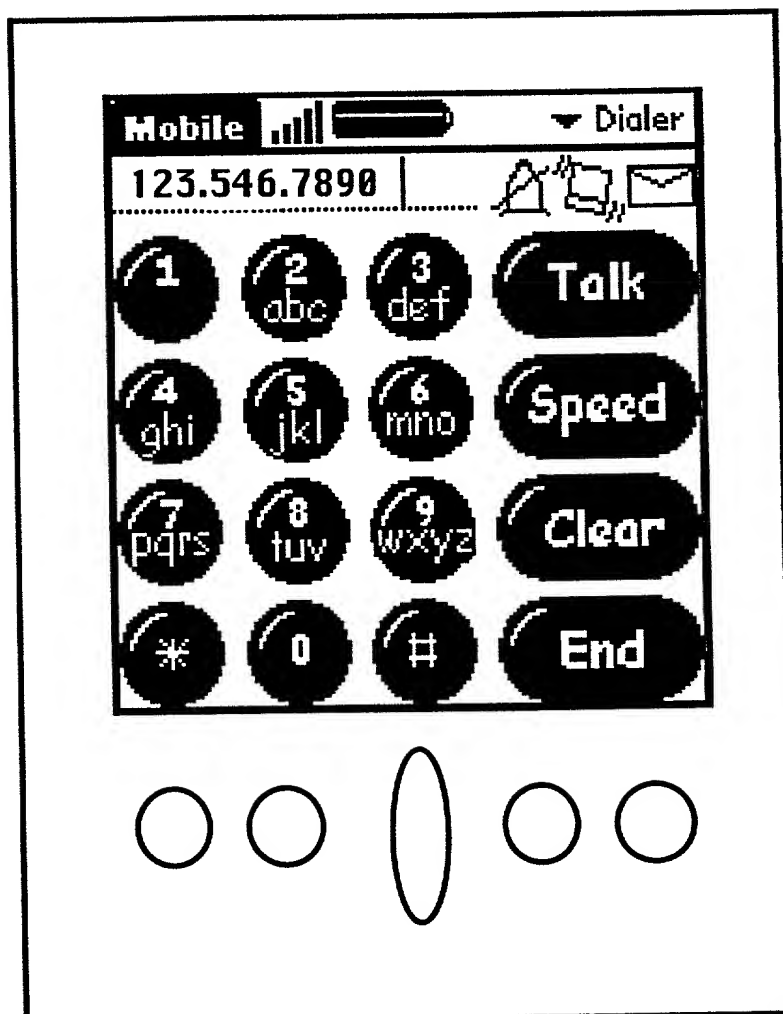[illegible]

## Declaration

METHOD AND SYSTEM FOR SINGLE-STEP ENABLEMENT OF TELEPHONY FUNCTIONALITY FOR A PORTABLE COMPUTER SYSTEM

☒ is attached hereto, or  
 was filed on \_\_\_\_\_ as application serial no. \_\_\_\_\_ : and  
 was amended on \_\_\_\_\_

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Number	Country	Date Filed	Priority Claimed
.....	.....	.....	yes .....
.....	.....	.....	yes .....

I hereby claim the benefit under Title 35, United States Code, Section 120 and 199(e) of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status (patented/pending/abandoned)
.....	.....	.....
.....	.....	.....

## Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent Trademark Office connected therewith.

James P. Hao	Registration No.: 36,398
Anthony C. Murabito	Registration No.: 35,295
John P. Wagner	Registration No.: 35,398
Glenn D. Barnes	Registration No.: 42,293
Rick G. Brewster	Registration No.: 35,077
Thomas M. Catale	Registration No.: 46,434
Jose S. Garcia	Registration No.: 43,628
Kenneth N. Glass	Registration No.: 42,587
Lin C. Hsu	Registration No.: 46,315
Patrick W. Ma	Registration No.: 44,215
Ronald M. Pomerence	Registration No.: 43,009
John F. Ryan	Registration No.: 47,050
William A. Zarbis	Registration No.: 46,120
Matthew J. Blecher	Registration No.: 46,558

Send Correspondence to:

**WAGNER, MURABITO & HAO LLP**  
Two North Market Street  
Third Floor  
San Jose, California 95113  
(408) 938-9060

## Signatures

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: **Rich Karstens**

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence Lake Forest Park, WA Citizenship USA  
(City State)  
P.O. Address 19025 37th Ave., NE, Lake Forest Park, WA 98155

Full Name of Second/Joint Inventor: **Ryan Robertson**

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence Seattle, WA Citizenship USA  
(City State)  
P.O. Address 215 20th Ave., East #107, Seattle, WA 98112